


WALL CONNECTIONS CORNER VERSIONS

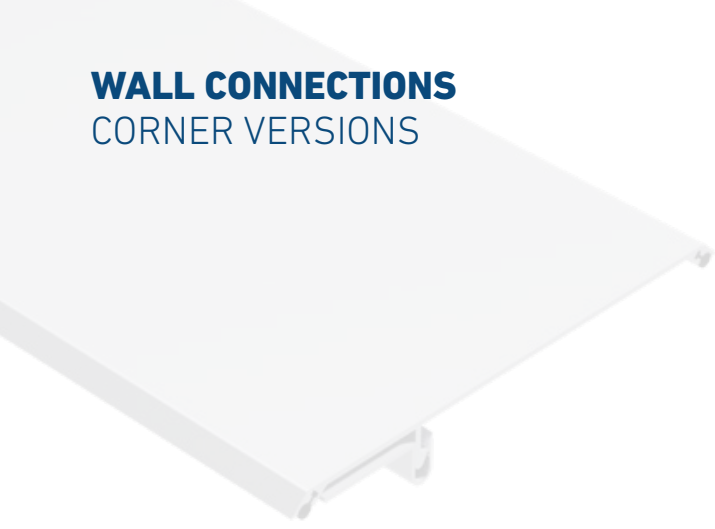

High-quality TPE (thermoplastic elastomer) sealing

Compensate unevenness of wall construction

Durable

Anodised surface for long-lasting high-grade visual appearance

Easy to install

Simply adjustable and quick to fasten

Invisible Fixing

Innovative clip construction

Expansion joint cover	Joint width max. b_f max [mm]	Total movement thermal Δb_f [mm]	Visible width b_s [mm]	Installation height h [mm]
WJC 50 E4	50	60 (+25/-35)	83	50
WJC 100 E4	100	135 (+50/-85)	165	50
WJC 150 E4	150	210 (+75/-135)	233	50
WJC 200 E4 *	200	200 (+70/-130)	273	65

* Available on request.


Joint width by the time of installation. Potential tolerance: ± 10 mm


Further joint widths available on demand.

Standard colour: Aluminium anodised. Other Colours on request

Production length: 3 m

WJC E4

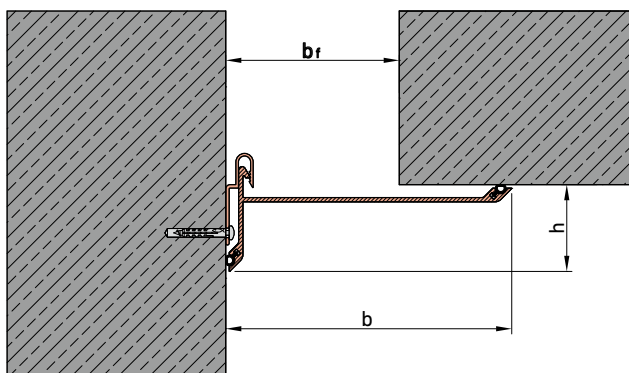

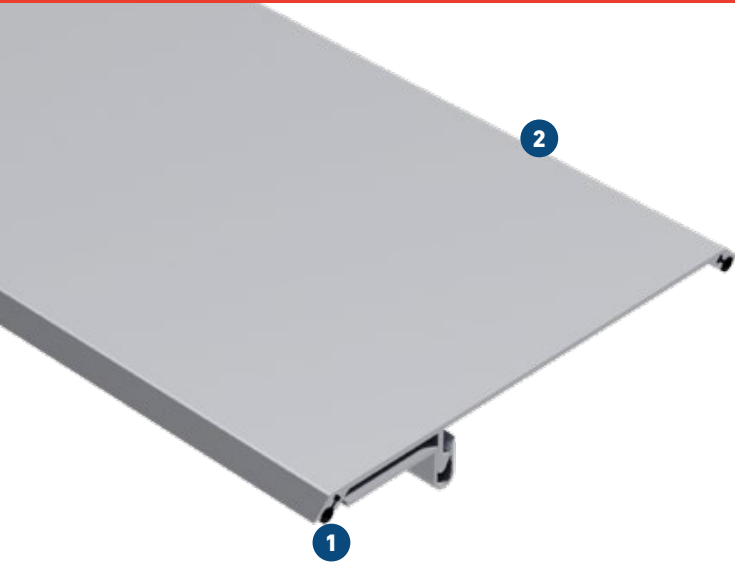

1 High-quality TPE (thermoplastic elastomer) sealing
Compensate unevenness of wall construction

Durable
Anodised surface for long-lasting high-grade visual appearance

Easy to install
Simply adjustable and quick to fasten

2 Invisible Fixing
Innovative clip construction

Expansion joint cover	Joint width max. b_f max [mm]	Total movement thermal Δb_f [mm]	Visible width b_s [mm]	Installation height h [mm]
WJC 50	50	65 (+25/-40)	140	10
WJC 100	100	140 (+50/-90)	222	10
WJC 150	150	215 (+75/-140)	290	10
WJC 200 *	200	200 (+70/-130)	340	10

* Available on request.

Joint width by the time of installation. Potential tolerance: ± 10 mm

Further joint widths available on demand.

Standard colour: Aluminium anodised. Other Colours on request

Production length: 3 m

